



ACO Access Cover UNIFACE 2.0 GS/SS

Product information for the product group

ACO Product benefits

- Tested and certified according to EN 1253-4, Uniface DEEP according to EN124
- Tested with space for tiles 15 mm (competitors covers tested completely filled with concrete)
- Bolt locked – child safety
- Corrosion resistant
- Small corner parts
- Secure installation – good connection with concrete (profiled frame or anchors)
- Discreet product after installation
- Easy tool for opening and manipulation
- Water-tight and odour-tight

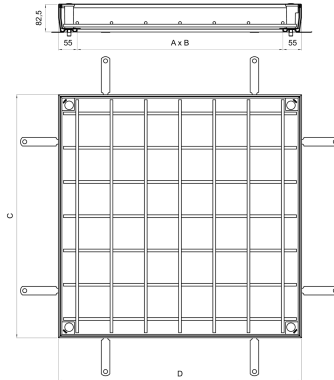

- Meets declared load class up to C250 for all clear openings up to 1 m
- Hot dip galvanized mild steel ($\geq 60 \mu\text{m}$ of zinc) or pickle passivated stainless steel
- Preciseness, design
- Thanks to unique bending on the top no additional stripes for installation necessary
- Easy opening after installation
- Less friction between frame and cover
- No sharp edges – improved safety
- Rolled profiles for galvanized version of the cover are made from innovative material Ultra-STEEL. It helps significantly reduce weight of the cover while maintaining the strength, stability and stiffness of the product.
- Rolled profiles for stainless steel version are made from conventional steel sheet in thickness 2 mm.

Item Technical Data 415903

Clear area (A x B)	Frame dimension (C x D)	Frame height (E)	Cover depth	Space for final floor	Class	Weight	Material
[mm]	[mm]	[mm]	[mm]	[mm]		[kg]	
600 x 600	710 x 710	82.5	110	15	N 250	18.3	AISI 304